



Type 3TG /玻璃管電流保險絲 Glass Time Lag Fuse


RoHS

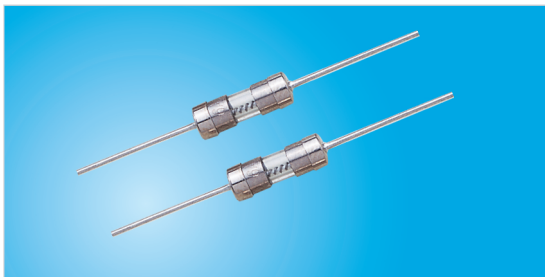

Dimensions(mm)尺寸

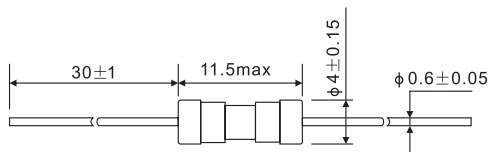

Time Current Characteristic Curve/電流-時間曲綫

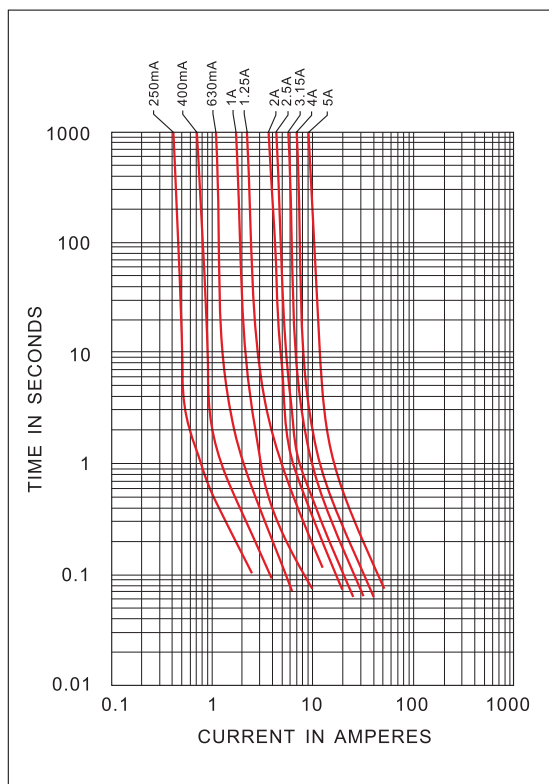

Electrical Specifications 電氣特性

Catalog Number 料號	Ampere Rated In 額定電流	Voltage Rating (VAC) 額定電壓	Normal Resistance Cold(Ohm) 標準冷阻值	Normal Melting I ² T(A ² sec) 標準熔斷值
3TG250	250mA	250V	0.570	0.563
3TG315	315mA		0.435	0.615
3TG400	400mA		0.330	0.992
3TG500	500mA		0.253	1.400
3TG630	630mA		0.175	2.143
3TG800	800mA		0.130	3.584
3TG1	1A		0.075	6.800
3TG1.25	1.25A		0.062	10.781
3TG1.6	1.6A		0.045	18.176
3TG2	2A		0.029	20.800
3TG2.5	2.5A		0.027	33.750
3TG3.15	3.15A		0.018	59.500
3TG4	4A		0.013	73.600
3TG5	5A		0.011	147.50
3TG6.3	6.3A	0.007	317.50	

Electrical Characteristics 熔斷特性 (IEC60127-3 Sheet 4)

Testing Current	Blow Time	
	Minimum	Maximum
150%	1 hrs	N/A
210%	N/A	120 sec
275%	400 ms	10 sec
400%	150 ms	3 sec
1000%	20 ms	150 ms

Approvals 認證

Safety Agency	Amp range/Volt @ I.R.ability
	250mA-6.3A/250V AC @35A or 10In whichever is greater

Operation Temperature 工作溫度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Glass body / Nickel Plated Brass Caps
Lead Wire: Tin plated Copper, Diameter 0.6mm

Packaging 包裝

In Bulk: 3TG-500pcs per bag
3TG-20000 pcs outer box