



Type MGC/微型電流保險絲 Fast Acting Microfuse

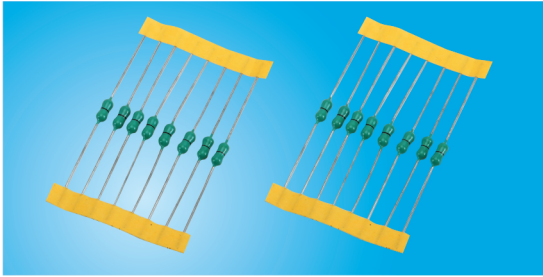


Dimensions(mm)尺寸

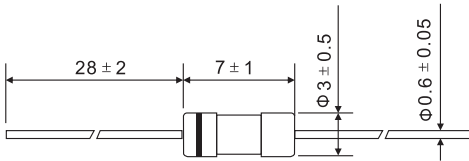

Electrical Specifications 電氣特性

Catalog Number 料號	Ampere Rated In 額定電流	Voltage Rating (VAC) 額定電壓	Normal Resistance Cold(Ohm) 標準冷阻值	Normal Melting I ² T(A ² sec) 標準熔斷值
MGC250	250mA	125V/ 250V	0.2920	0.008
MGC375	375mA		0.1850	0.012
MGC500	500mA		0.1460	0.150
MGC750	750mA		0.0695	0.113
MGC1	1A		0.0640	0.10
MGC1.5	1.5A		0.0700	0.25
MGC2	2A		0.0340	0.80
MGC2.5	2.5A		0.0270	1.25
MGC3	3A		0.0310	0.90
MGC3.5	3.5A		0.0270	1.20
MGC4	4A		0.0170	4.80
MGC5	5A		0.0140	5
MGC7	7A		0.0120	7
MGC10	10A	0.0070	21	

Time Current Characteristic Curve/電流-時間曲綫

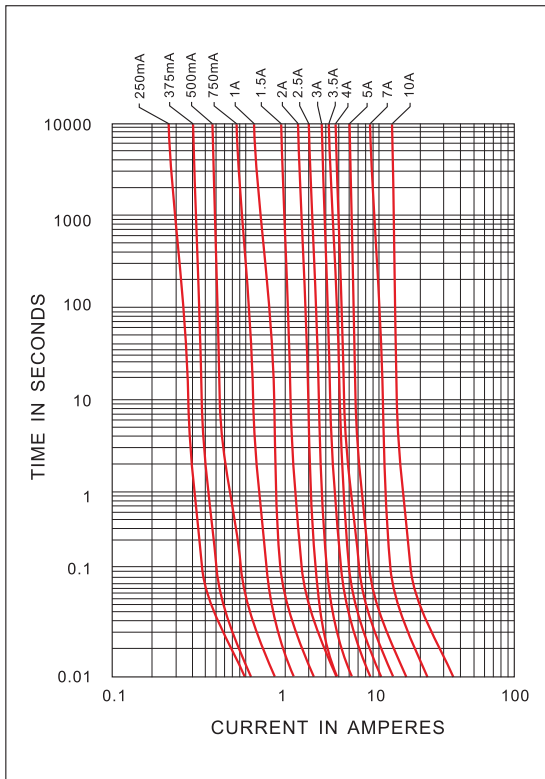

Electrical Characteristics 熔断特性 (UL248-14)

Testing Current	Blow Time	
	Minimum	Maximum
100%	4 hrs	N/A
200%	N/A	5 sec

Approvals 認證

Safety Agency	Amp range/Volt @ I.R.ability
	250mA-10A/125V AC @ 50A 250mA-10A/250V AC @ 50A

Operation Temperature 工作温度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Ceramic body / Nickel Plated Brass Caps

Lead Wire: Tin plated Copper, Diameter 0.6mm

Packaging 包裝

On Tape: MGC-2000pcs in box

MGC-10000pcs outer box