



Type GSP Series / 突波吸收器 Surge Absorber

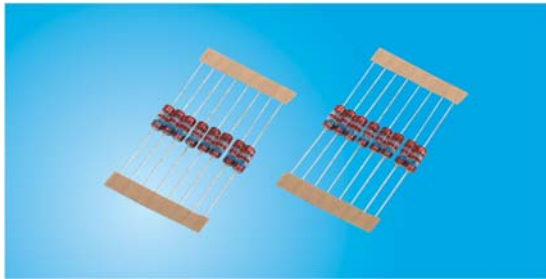

Dimensions(mm)尺寸

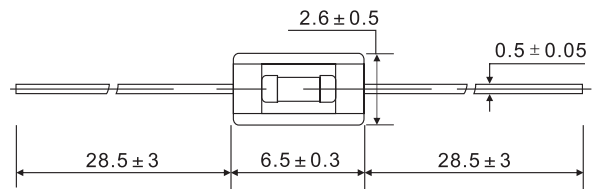

Features 特性

- Quick response
- Low capacitance

Applications 應用

- 變頻空調 Conversion air conditioner
- TEL,FAX,MODEM
- Power supply

Electrical Specifications 電氣特性

Catalog Number 料號	DC Spark-Over Voltage 標稱直流擊穿電壓 100V/s Vs(V)	AC withstanding voltage 耐交流能力	Nom Impulse Discharge Current 耐衝擊電流 8x20 μS kA	Nom Impulse Discharge Current 耐衝擊電流 8x20μs(A)	Insulation Resistance 絕緣電阻		Capacitance 電容值 C 1kHz<6V pF Max.
					Min. MΩ	DC V	
GSP-141N	140V ± 30%		1KA 1times	500A 10times	100	100	1.0
GSP-201M	200V ± 20%				100	100	1.0
GSP-301M	300V ± 20%				100	100	1.0
GSP-401M	400V ± 20%				100	250	1.0
GSP-501M	500V ± 20%				100	250	1.0
GSP-601M	600V ± 20%				100	250	1.0

AXIAL TAPING 直綫編帶	符號	尺寸(mm)
	W	52 ± 1.5
	P	5.0 ± 0.5
	L1-L2	1max
	T	6.0 ± 1.0
	Z	1.2max
	R	Terminals must not project from tape
	t	6max
	S	0.8max
	D1	Φ 0.5 ± 0.05
	L	6.8Max

Materials 材料

- Ceramic : Ceramic Rod
- Metallization of Glass body
- End termination:Dumet wire
- End termination overcoat: Tin

Operation Temperature 工作溫度

-40°C to 125°C

Packaging 包裝

- On Taping:GSP series-2000pcs Per Reel
- GSP series-20000pcs outer box